



AmorphCore series ITA-01

Interstage transformer

1:1

Bifilar wound interstage transformer

- **Amorphous Metglas™ dual C-core**
- Bifilar winding scheme
- 1:1 winding ratio
- 5 – 261,000 Hz bandwidth
- 25 mA nominal DC current


The AmorphCore series " type ITA-01" is an interstage transformer that makes use of a substantial amorphous double C-core sourced from a leading manufacturer thereby ensuring high quality standards. Interstage coupling, if applied correctly, results in the most efficient coupling of the driver stage to the power tube and also has the benefit of substantially reduced supply voltages. In most cases, interstage transformers have a bad reputation with respect to bandwidth and the presence of resonances at higher frequencies. There is one specific topology that does not suffer from the aforementioned limitations: a bifilar wound 1:1 interstage transformer. When using a bifilar transformer the coupling between the two windings is that good that you can put as many as possible windings on it while still having very good high frequency behaviour. Bandwidth is around 5 Hz ... > 200 kHz when using an ECC99 to drive a 300B power tube.

E L E C T R I C A L D A T A

Winding ratio	1:1
Bandwidth (-3 dB @ 1W, sec. grounded)	5 – 261,000 Hz
Core saturation	20 Hz @ 50 Vrms
Primary inductance	60 H _y
Primary DC resistance	365 Ω
Sec. DC resistance	365 Ω
Maximum recommended P/S DC voltage	375 V

Ω

level (dB) vs. frequency (Hz) 2K2 generator resistance
100K // 50 pF load resistance

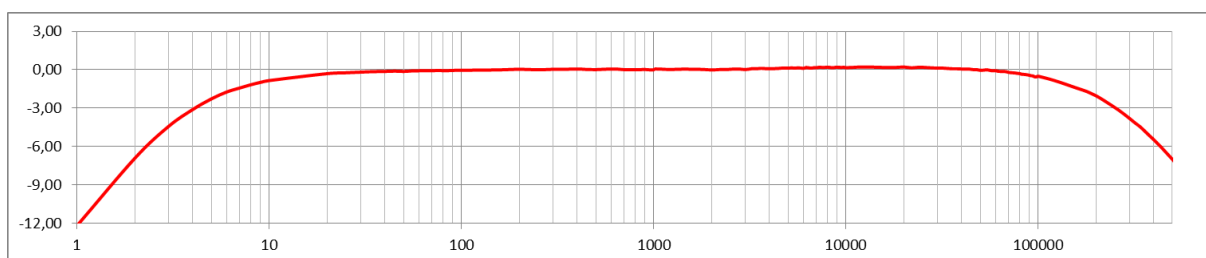

Bandwidth for various Rgen
RL=100K //50pF, secondary grounded

Rgen (ohm)	f-3dB (Hz) LF	f-3dB (kHz) HF
700	1.3	738
2200	4.1	261
5000	9.3	113
8200	15.3	73

Mechanical data & electrical connections

CASE-1

[preliminary new case layout datasheet](#)